

Tripod supports

Technopolymer

MATERIAL

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

STANDARD EXECUTIONS

- **BAS3-A:** zinc-plated steel M10 screws, nuts and washers.
- **BAS3-SST:** AISI 304 stainless steel M10 screws, nuts and washers


ASSEMBLY ON LEVELLING ELEMENTS

The three bearings of the base are supplied with brass bosses, threaded pass-through hole for the assembly of the stem of the levelling element series LS.A, LV.A, LV.F.


FEATURES

The rounded shapes with a modern and elegant aesthetic guarantee maximum cleanability in the event of liquids or dust falling from above.

Maximum tightening torque for screw assembly 35 Nm.




Retention force
P = 2000 N



Max. static load
P = 9800 N

Values obtained with tightening torque 35 Nm

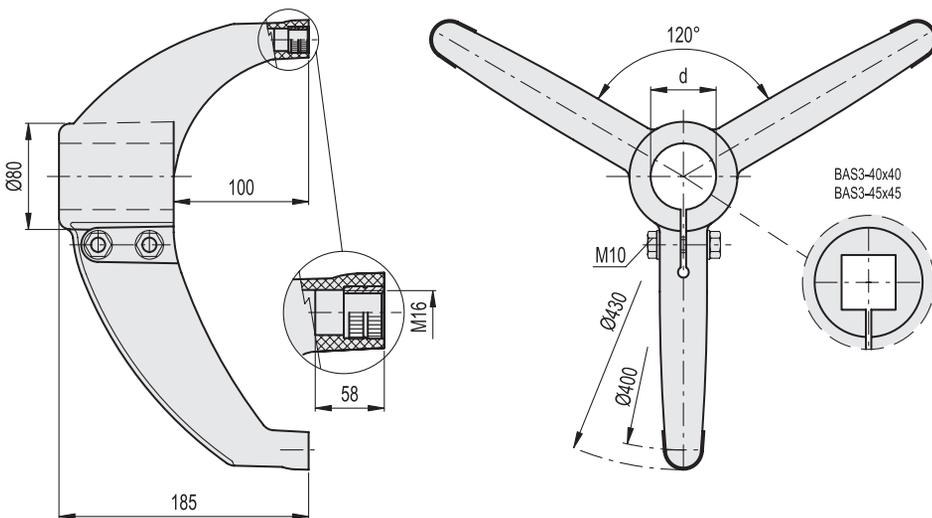

BAS3-A

Code	Description	d Tube (mm)	d Tube (GAS)	d Tube (inch)	⚖️
419592	BAS3-42-A	42.4	1"1/4	-	800
419590	BAS3-48-A	48.3	1"1/2	-	790
419594	BAS3-50-A	50.8	-	2"	780
419588	BAS3-60-A	60.3	2"	-	770
419750	BAS3-40x40-A	40	-	-	800
419752	BAS3-45x45-A	45	-	-	795

BAS3-SST

STAINLESS STEEL

Code	Description
419593	BAS3-42-SST
419591	BAS3-48-SST
419595	BAS3-50-SST
419589	BAS3-60-SST
419751	BAS3-40x40-SST
419753	BAS3-45x45-SST