

Disk Handwheels

Aluminum

SPECIFICATION

Bore codes

- Version **B**: Without keyway
- Version **K**: With keyway DIN 6885-1 P9

Aluminum

- Hub machined
- Rim
 - turned and polished
 - Radial and axial runout of the rim < 0.4
- Unmachined body shot-blasted

INFORMATION

Disk handwheels DIN 3670 have recessed grips at their back. As a rule they are supplied without handle, but the mounting of a handle is possible.


The handwheel diameter $d_1=80$ and $d_1=400$ are not provided in the official standard sheet.

ACCESSORY

- GN 184 Countersunk Washers (for Axial Fixing) (see page 971)

TECHNICAL INFORMATION

- Keyway P9 DIN 6885-1 (see page A16)
- Cross Holes GN 110 (see page A17)
- ISO-Fundamental Tolerances (see page A21)

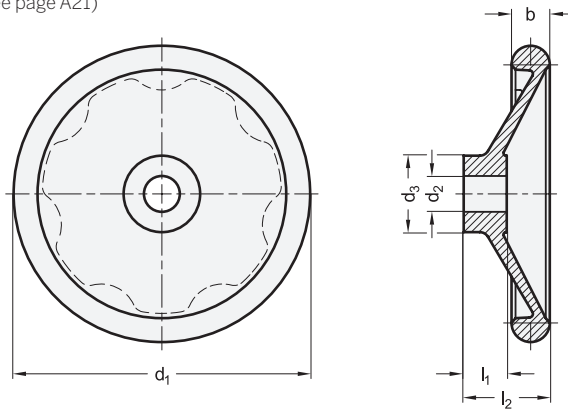

DIN 3670-B

Description	d_1	d_2 H7 Bore	b	d_3	l_1	$l_2 \approx$	
DIN 3670-80-B10	80	10	14	26	16	29	128
DIN 3670-80-B12	80	12	14	26	16	29	127
DIN 3670-100-B10	100	10	15	28	17	33	188
DIN 3670-100-B12	100	12	15	28	17	33	185
DIN 3670-125-B12	125	12	16	31	18	36	306
DIN 3670-125-B14	125	14	16	31	18	36	289
DIN 3670-160-B14	160	14	18	36	20	40	514
DIN 3670-160-B16	160	16	18	36	20	40	510
DIN 3670-200-B18	200	18	22	42	24	45	943
DIN 3670-200-B20	200	20	22	42	24	45	938
DIN 3670-200-B22	200	22	22	42	24	45	940
DIN 3670-250-B22	250	22	26	48	28	50	1608
DIN 3670-250-B24	250	24	26	48	28	50	1596
DIN 3670-250-B26	250	26	26	48	28	50	1582
DIN 3670-315-B26	315	26	28	56	33	56	2695
DIN 3670-315-B28	315	28	28	56	33	56	2689
DIN 3670-315-B30	315	30	28	56	33	56	2683
DIN 3670-400-B30	400	30	32	65	38	63	5000
DIN 3670-400-B32	400	32	32	65	38	63	4342

DIN 3670-K

Description	d_1	d_2 H7 Bore	b	d_3	l_1	$l_2 \approx$	
DIN 3670-80-K10	80	10	14	26	16	29	126
DIN 3670-80-K12	80	12	14	26	16	29	125
DIN 3670-100-K10	100	10	15	28	17	33	188
DIN 3670-100-K12	100	12	15	28	17	33	184
DIN 3670-125-K12	125	12	16	31	18	36	304
DIN 3670-125-K14	125	14	16	31	18	36	302
DIN 3670-160-K14	160	14	18	36	20	40	526
DIN 3670-160-K16	160	16	18	36	20	40	492
DIN 3670-200-K18	200	18	22	42	24	45	930
DIN 3670-200-K20	200	20	22	42	24	45	935
DIN 3670-200-K22	200	22	22	42	24	45	881
DIN 3670-250-K22	250	22	26	48	28	50	1700
DIN 3670-250-K24	250	24	26	48	28	50	1592
DIN 3670-250-K26	250	26	26	48	28	50	1578
DIN 3670-315-K26	315	26	28	56	33	56	2690
DIN 3670-315-K28	315	28	28	56	33	56	2684
DIN 3670-315-K30	315	30	28	56	33	56	2630
DIN 3670-400-K30	400	30	32	65	38	63	4450
DIN 3670-400-K32	400	32	32	65	38	63	4552