

Tommy Nuts

Steel / Stainless Steel, with Movable Bar

SPECIFICATION

Tommy nut

- Steel
 - Property class 5
 - Blackened
- Stainless steel AISI 304 NI

Bar end caps

Plastic, Polyethylene (PE)
Gray

Pressure spring

Stainless steel AISI 301




INFORMATION

Tommy nuts DIN 6307 are used for clamping and locking.
The sliding bar is protected against loss by the end caps and held in any position by the pressure spring.

TECHNICAL INFORMATION

- Strength Values of Nuts (see page A20)
- Stainless Steel Characteristics (see page A26)

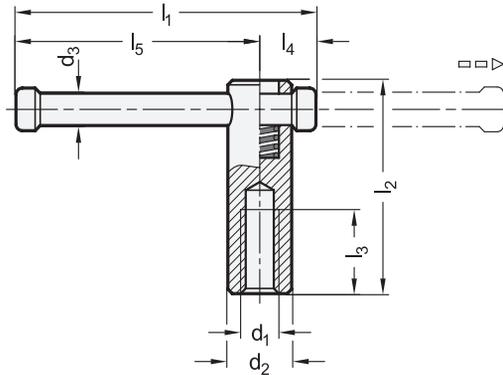

DIN 6307-ST

Description	d1	d2	d3	l1	l2	l3 min.	l4	l5	⚖
DIN 6307-M6	M 6	14	6	60	50	15	15	45	58
DIN 6307-M8	M 8	14	6	60	55	17,5	15	45	60
DIN 6307-M10	M 10	18	8	80	60	20	17	63	110
DIN 6307-M12	M 12	20	10	100	70	25	19	81	173
DIN 6307-M16	M 16	24	13	120	85	35	23	97	320
DIN 6307-M20	M 20	30	16	140	95	40	28	112	568

DIN 6307-NI

STAINLESS STEEL

Description	d1	d2	d3	l1	l2	l3 min.	l4	l5	⚖
DIN 6307-M6-NI	M 6	14	6	60	50	15	15	45	59
DIN 6307-M8-NI	M 8	14	6	60	55	17,5	15	45	61
DIN 6307-M10-NI	M 10	18	8	80	60	20	17	63	123
DIN 6307-M12-NI	M 12	20	10	100	70	25	19	81	173
DIN 6307-M16-NI	M 16	24	13	120	85	35	23	97	320
DIN 6307-M20-NI	M 20	30	16	140	95	40	28	112	591

Clamping levers 3