

Tubular Handles

Tube Aluminum, Legs Zinc Die Casting with Movable Handle Legs

SPECIFICATION

Type

- Type **A**: Mounting from the back (threaded blind bore)

Handle tube

Aluminum, wall thickness 1,5 mm

- Powder coated
 - Black, RAL 9005, textured finish **SW**
Handle legs black
- Anodized, natural color **ELS**
Handle legs black
- Anodized, natural color **ELG**
Handle legs silver

Handle legs

Zinc die casting

Powder coated, textured finish

- Black, RAL 9005 for SW / ELS
- Silver, RAL 9006 for ELG

Cover

Plastic

- Black, matte finish for SW / ELS
- Light gray, matte finish for ELG



INFORMATION

The spacing of the attachment holes of the tubular handles GN 333.2 is adjustable.

Further handle legs can be added for very long tubular handles. Individual handle legs for tubular handles Ø 28 (type A) are available under GN 333.8 (see page 501).

Tubular handles GN 333.2 are supplied unassembled.

ACCESSORY


- GN 333.8 Handle Legs (see page 501)

ON REQUEST

- Special lengths

TECHNICAL INFORMATION

- Load Rating Information (see page A35)

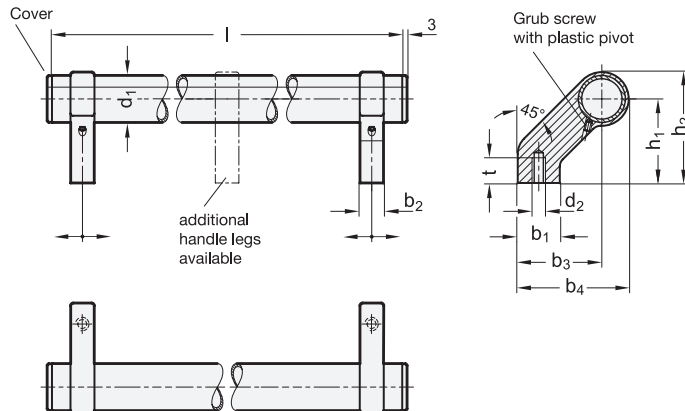

* Complete with

SW **ELS** **ELG**

GN 333.2

Description	d1	Length l	d2	b1	b2	b3	b4	h1	h2	t min.	⚖
GN 333.2-28-242-A-*	28	242	M 8	25	14	50	66	50	66	15	380
GN 333.2-28-292-A-*	28	292	M 8	25	14	50	66	50	66	15	392
GN 333.2-28-392-A-*	28	392	M 8	25	14	50	66	50	66	15	470
GN 333.2-28-492-A-*	28	492	M 8	25	14	50	66	50	66	15	520
GN 333.2-28-592-A-*	28	592	M 8	25	14	50	66	50	66	15	560

Weight SW