

Control Knobs with Adjustable Spindle

Body / Spindle Steel, Knob Aluminum

SPECIFICATION

Types

- Type **A**: Mounting hole parallel to the spindle axle
- Type **B**: Mounting hole vertical to the spindle axle
- Type **S1**: Mounting with hex head screw

Coding

- Coding **SR**: With scale 0,1...0,9, 50 graduations
- Coding **SL**: With scale 0,1...0,9, 50 graduations ascending anti-clockwise

Body

- Steel
- Matte chrome plated
- Scales laser-engraved

Spindle

- Steel
- Plain

Control knob

- Aluminum
- Anodized, black

Hex head screw

- Steel
- Zinc plated, blue passivated

Cover

- Plastic
- Light gray



INFORMATION

Control knobs with adjustable spindle GN 727 allow precise adjustment or aligning i. e. of a positive stop. The spindle thread is without backlash.

The graduations on the control knob are non-abrasive and well legible.


The light gray cover shrouds the fixing components as well as the shaft end.


Regarding design, numbering run, numbering position and numbering sequence of the scale please see the layout for scale rings on the order sheet "How to Order Graduations" (see page 594).

TECHNICAL INFORMATION

- How to Order Graduations (see page 594)

Complementary dimensions with technical details

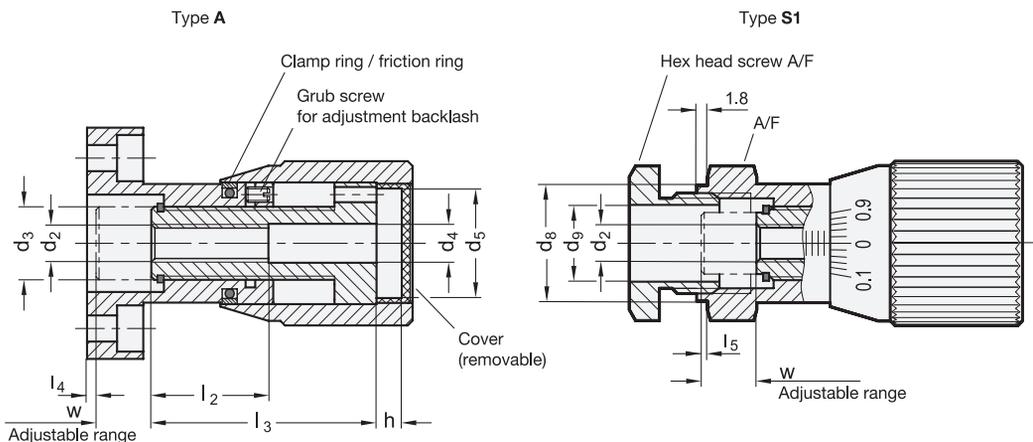

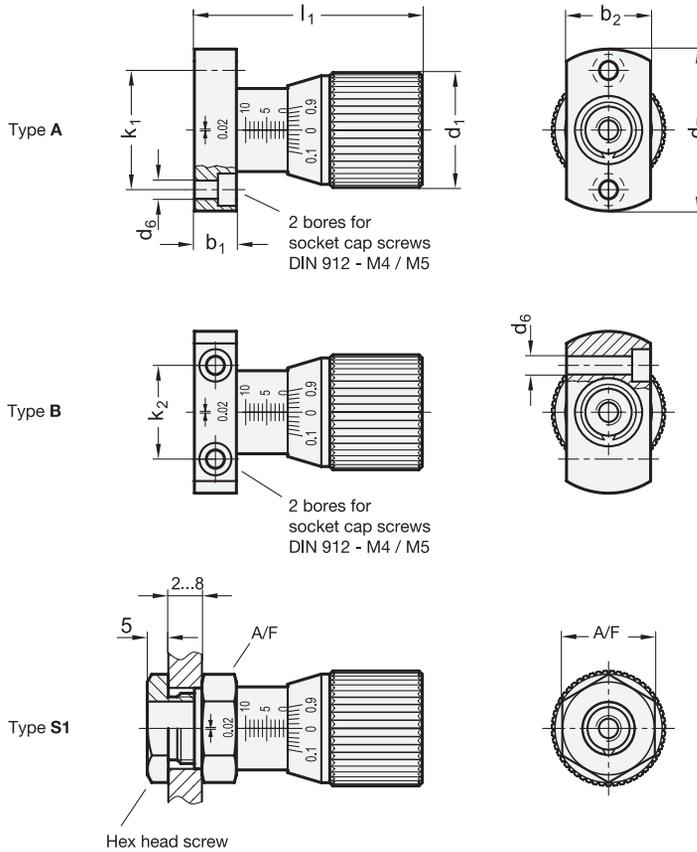

GN 727-A

Description	d1	d2	d3	d4	d5	d6	d7	d8 -0.05 Spigot	d9	b1	b2	h	k1	k2	l1 +0.2	l2	l3	l4	l5	A/F	w Adjustable range	⚖
GN 727-27-A-SR	27	M 6	M 12 x 1	6.4	18	4.3	38	19	12.5	10	20	4.3	28	22	54	19.5	37.5	0.5	1	22	10	103
GN 727-27-A-SL	27	M 6	M 12 x 1	6.4	18	4.3	38	19	12.5	10	20	4.3	28	22	54	19.5	37.5	0.5	1	22	10	103
GN 727-34-A-SR	34	M 8	M 16 x 1	8.5	23	5.3	50	24	18.3	11	25	4.2	36	30	67	23.5	45.5	0.5	1	27	15	203
GN 727-34-A-SL	34	M 8	M 16 x 1	8.5	23	5.3	50	24	18.3	11	25	4.2	36	30	67	23.5	45.5	0.5	1	27	15	203

GN 727-B

Description	d1	d2	d3	d4	d5	d6	d7	d8 -0.05 Spigot	d9	b1	b2	h	k1	k2	l1 +0.2	l2	l3	l4	l5	A/F	w Adjustable range	⚖
GN 727-27-B-SR	27	M 6	M 12 x 1	6.4	18	4.3	38	19	12.5	10	20	4.3	28	22	54	19.5	37.5	0.5	1	22	10	103
GN 727-27-B-SL	27	M 6	M 12 x 1	6.4	18	4.3	38	19	12.5	10	20	4.3	28	22	54	19.5	37.5	0.5	1	22	10	103
GN 727-34-B-SR	34	M 8	M 16 x 1	8.5	23	5.3	50	24	18.3	11	25	4.2	36	30	67	23.5	45.5	0.5	1	27	15	206
GN 727-34-B-SL	34	M 8	M 16 x 1	8.5	23	5.3	50	24	18.3	11	25	4.2	36	30	67	23.5	45.5	0.5	1	27	15	206

GN 727-S1

Description	d1	d2	d3	d4	d5	d6	d7	d8 -0.05 Spigot	d9	b1	b2	h	k1	k2	l1 +0.2	l2	l3	l4	l5	A/F	w Adjustable range	⚖
GN 727-27-S1-SR	27	M 6	M 12 x 1	6.4	18	4.3	38	19	12.5	10	20	4.3	28	22	54	19.5	37.5	0.5	1	22	10	110
GN 727-27-S1-SL	27	M 6	M 12 x 1	6.4	18	4.3	38	19	12.5	10	20	4.3	28	22	54	19.5	37.5	0.5	1	22	10	110
GN 727-34-S1-SR	34	M 8	M 16 x 1	8.5	23	5.3	50	24	18.3	11	25	4.2	36	30	67	23.5	45.5	0.5	1	27	15	182
GN 727-34-S1-SL	34	M 8	M 16 x 1	8.5	23	5.3	50	24	18.3	11	25	4.2	36	30	67	23.5	45.5	0.5	1	27	15	182

