

Spoked Handwheels

Aluminum, Powder Coated

SPECIFICATION

Bore codes

- Version **B**: Without keyway
- Version **K**: With keyway DIN 6885-1 P9

Types

- Type **A**: Without handle
- Type **R**: With revolving handle

Wheel body

- Aluminum die casting
- Hub machined
- Rim turned
- Radial and axial runout < 0.4
- Powder coated
 - Black, RAL 9005, textured finish **SW**
 - Silver, RAL 9006, textured finish **SR**

Cover

- Plastic, Polyamide (PA)
- Light grey

Revolving handle GN 798.2 (see page 578)

- Plastic, Polyamide (PA)
- Black, matte finish
- Spindle steel
- Zinc plated, blue passivated



reddot design award

INFORMATION


Spoked handwheels GN 924 are distinguished by modern design. The removable plastic cover shrouds the fixing components such as countersunk washers and protruding or recessed shafts.


ACCESSORY

- GN 184 Countersunk Washers (see page 971)

TECHNICAL INFORMATION

- Keyway DIN 6885 (see page A16)
- Cross Holes GN 110 (see page A17)
- ISO-Fundamental Tolerances (see page A21)

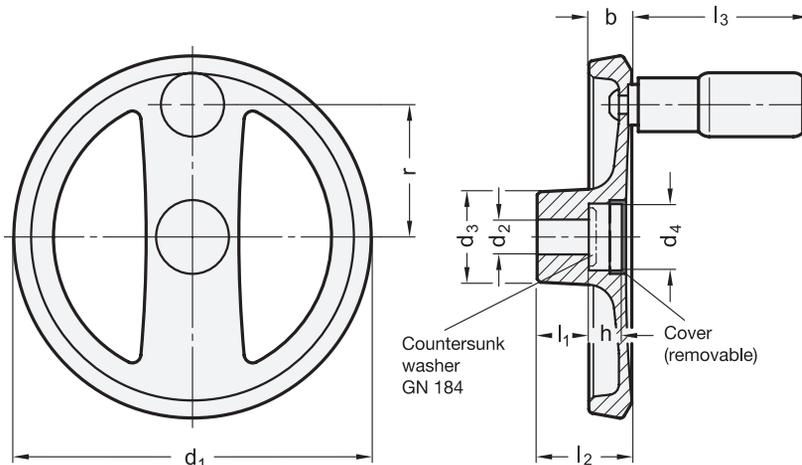

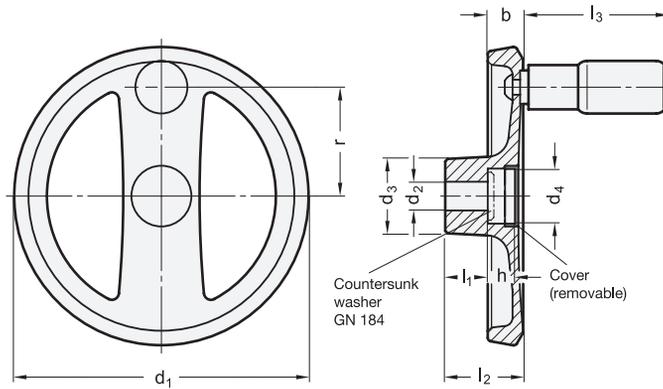

* Complete with color index of the Handwheels (SW or SR)

SW
SR
 RAL9005 RAL9006

GN 924-A

Description	d1	d2 H7 Bore	d3	d4	b	h	l1	l2 ≈	l3 ≈	r	Ø Handle GN 798.2	Recommended countersunk washer	⚖
GN 924-125-B12-A-*	125	12	31	23	15	11	18	33.5	61.5	45.5	22	GN 184-20	255
GN 924-125-K12-A-*	125	12	31	23	15	11	18	33.5	61.5	45.5	22	GN 184-20	255
GN 924-125-B14-A-*	125	14	31	23	15	11	18	33.5	61.5	45.5	22	GN 184-20	250
GN 924-125-K14-A-*	125	14	31	23	15	11	18	33.5	61.5	45.5	22	GN 184-20	250
GN 924-140-B14-A-*	140	14	36	28.5	16.5	13	19	36.5	76.5	52	24	GN 184-25	340
GN 924-140-K14-A-*	140	14	36	28.5	16.5	13	19	36.5	76.5	52	24	GN 184-25	340
GN 924-140-B16-A-*	140	16	36	28.5	16.5	13	19	36.5	76.5	52	24	GN 184-25	338
GN 924-140-K16-A-*	140	16	36	28.5	16.5	13	19	36.5	76.5	52	24	GN 184-25	338
GN 924-160-B14-A-*	160	14	36	28.5	18	14.5	20	39.5	76.5	61	24	GN 184-25	460
GN 924-160-K14-A-*	160	14	36	28.5	18	14.5	20	39.5	76.5	61	24	GN 184-25	460
GN 924-160-B16-A-*	160	16	36	28.5	18	14.5	20	39.5	76.5	61	24	GN 184-25	496
GN 924-160-K16-A-*	160	16	36	28.5	18	14.5	20	39.5	76.5	61	24	GN 184-25	496
GN 924-200-B18-A-*	200	18	42	36	20.5	16	24	45.5	85	77.5	25	GN 184-32	730
GN 924-200-K18-A-*	200	18	42	36	20.5	16	24	45.5	85	77.5	25	GN 184-32	730
GN 924-200-B20-A-*	200	20	42	36	20.5	16	24	45.5	85	77.5	25	GN 184-32	740
GN 924-200-K20-A-*	200	20	42	36	20.5	16	24	45.5	85	77.5	25	GN 184-32	740

GN 924-R

Description	d1	d2 H7 Bore	d3	d4	b	h	l1	l2 ≈	l3 ≈	r	Ø Handle GN 798.2	Recommended countersunk washer	⚖
GN 924-125-B12-R-*	125	12	31	23	15	11	18	33.5	61.5	45.5	22	GN 184-20	340
GN 924-125-K12-R-*	125	12	31	23	15	11	18	33.5	61.5	45.5	22	GN 184-20	340
GN 924-125-B14-R-*	125	14	31	23	15	11	18	33.5	61.5	45.5	22	GN 184-20	380
GN 924-125-K14-R-*	125	14	31	23	15	11	18	33.5	61.5	45.5	22	GN 184-20	380
GN 924-140-B14-R-*	140	14	36	28.5	16.5	13	19	36.5	76.5	52	24	GN 184-25	420
GN 924-140-K14-R-*	140	14	36	28.5	16.5	13	19	36.5	76.5	52	24	GN 184-25	420
GN 924-140-B16-R-*	140	16	36	28.5	16.5	13	19	36.5	76.5	52	24	GN 184-25	429
GN 924-140-K16-R-*	140	16	36	28.5	16.5	13	19	36.5	76.5	52	24	GN 184-25	429
GN 924-160-B14-R-*	160	14	36	28.5	18	14.5	20	39.5	76.5	61	24	GN 184-25	560
GN 924-160-K14-R-*	160	14	36	28.5	18	14.5	20	39.5	76.5	61	24	GN 184-25	560
GN 924-160-B16-R-*	160	16	36	28.5	18	14.5	20	39.5	76.5	61	24	GN 184-25	550
GN 924-160-K16-R-*	160	16	36	28.5	18	14.5	20	39.5	76.5	61	24	GN 184-25	550
GN 924-200-B18-R-*	200	18	42	36	20.5	16	24	45.5	85	77.5	25	GN 184-32	875
GN 924-200-K18-R-*	200	18	42	36	20.5	16	24	45.5	85	77.5	25	GN 184-32	875
GN 924-200-B20-R-*	200	20	42	36	20.5	16	24	45.5	85	77.5	25	GN 184-32	880
GN 924-200-K20-R-*	200	20	42	36	20.5	16	24	45.5	85	77.5	25	GN 184-32	880

Weight SW

